


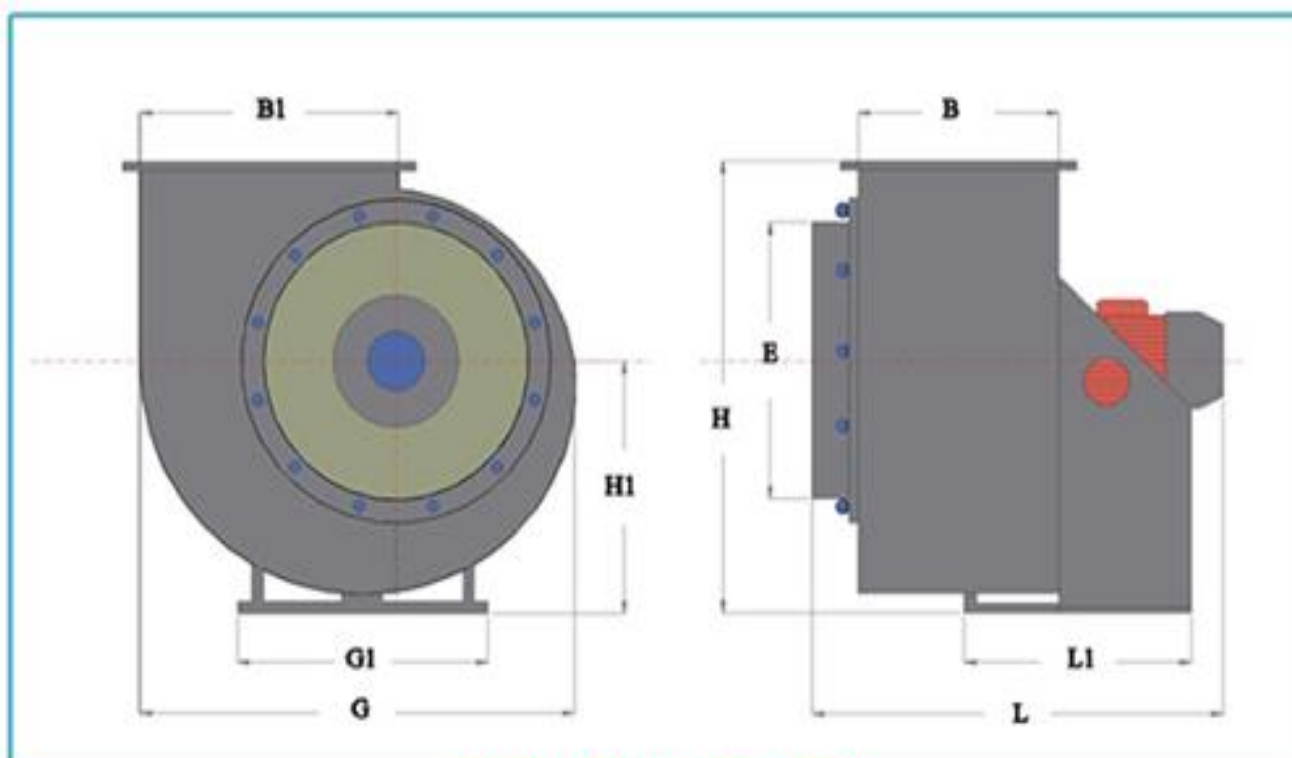

DİREK AKUPLE RADYAL ASPIRATÖR

KARAKTERİSTİK ÖZELLİKLER				ASPO	ASPIRATÖR BOYUTLARI								
BASINÇ mmSS	DEBİ m ³ /h	DEVİR	Kw	TİP	E	B	B1	L	L1	H	H1	G	G1
10-25-45	1100-800-350	2850	0.25	N3-PD21A	125	125	125	340	300	310	155	200	140
30-50-75	1500-1000-600	2850	0.37	N3-PD25A	160	160	160	380	355	380	200	210	150
5-12-15	750-500-300	1550	0.25	N4-PD25A	160	160	160	380	355	380	200	210	150
30-50-80	2000-1200-700	2850	0.55	N3-PD28A	160	160	160	400	230	420	210	390	280
8-15-40	1000-800-500	1450	0.37	N4-PD28A	160	160	160	400	230	420	210	390	280
50-80-120	3500-1750-1000	2850	1.1	N3-PD32A	200	200	200	470	260	480	265	460	260
10-20-30	2000-1200-600	1450	0.37	N4-PD32A	200	200	200	470	260	480	265	460	260
80-110-130	5000-4000-3000	2850	3	N3-PD36A	250	250	250	580	260	530	280	510	260
15-25-40	3500-2500-1000	1450	0.55	N4-PD36A	250	250	250	580	260	530	280	510	260
100-140-170	7000-6000-4500	2850	4	N3-PD40A	420	350	400	650	370	650	350	665	320
20-40-50	6000-4000-3000	1450	0.75	N4-PD40A	420	350	400	650	370	650	350	665	320
30-50-60	7000-5000-4000	1450	1.1	N4-PD45A	460	350	450	650	390	740	410	760	360
10-18-25	5000-4000-3000	1000	0.55	N1-PD45A	460	350	450	650	390	740	410	760	360
25-50-75	10000-8000-5000	1450	2.2	N4-PD50A	500	400	500	850	450	790	455	760	450
20-25-35	5000-4000-3000	1000	0.75	N1-PD50A	500	400	500	850	450	790	455	760	450
30-80-100	14000-10000-7000	1450	4	N4-PD56A	560	450	550	870	520	950	555	960	480
25-35-45	9000-7000-5000	1000	1.1	N1-PD56A	560	450	550	870	520	950	555	960	480
65-100-135	20000-14000-9000	1450	7.5	N4-PD63A	630	500	650	970	600	1190	790	1150	520
12-70-110	14000-10000-8000	1000	3	N1-PD63A	630	500	650	970	590	1190	790	1150	520
10-15-25	10000-8000-6000	750	2.2	N7-PD63A	630	500	650	1050	590	1190	790	1130	520
60-125-150	25000-18000-12000	1450	22	N4-PD69A	690	530	740	1120	640	1300	805	1270	640
25-50-70	18000-15000-9000	1000	5.5	N1-PD69A	690	530	740	1120	640	1300	805	1270	640
10-25-35	12000-10000-8000	750	2.2	N7-PD69A	690	530	740	1120	640	1300	805	1270	640
100-160-190	35000-25000-18000	1450	15	N4-PD76A	760	580	800	1245	690	1420	835	1380	690
30-60-90	25000-18000-12000	1000	7.5	N1-PD76A	760	580	800	1245	690	1420	835	1380	690
15-30-45	18000-14000-10000	1650	3	N7-PD76A	760	580	800	1245	690	1420	805	1380	690
80-180-230	50000-35000-25000	1450	30	N4-PD84A	840	620	850	1300	780	1600	870	1450	740
30-80-100	30000-20000-15000	1000	7.5	N1-PD84A	840	620	850	1300	780	1600	870	1450	740
13-35-55	30000-20000-14000	750	4	N7-PD84A	840	620	850	1300	780	1600	870	1450	740